
60HT

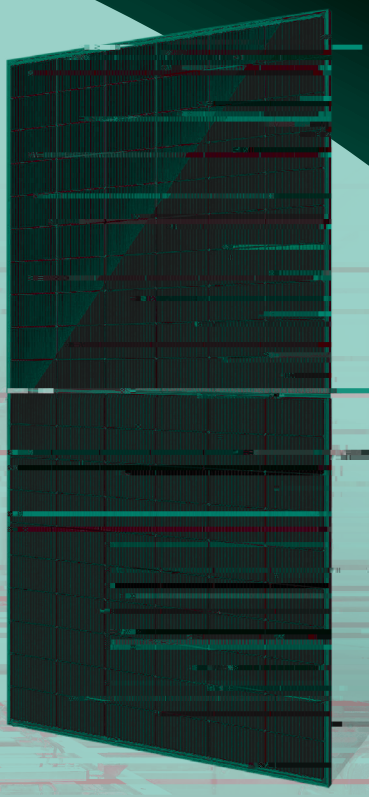

More power output in field operation due to better thermal behaviors, weak-light performance and bifaciality


High module quality ensures long-term reliability

Module Characteristics

15-Year Product Warranty	**30**-Year Linear Power Warranty	**1%** First Year Degradation	**0.4%** Annual Power Degradation

IEC 61215(2021) / IEC 61730(2023)
ISO 9001: 2015: ISO Quality Management System
Anti-PID / Ammonia / Salt-mist / Dust and sand
Made in China

(STC 1000W/M² 25 AM1.5)

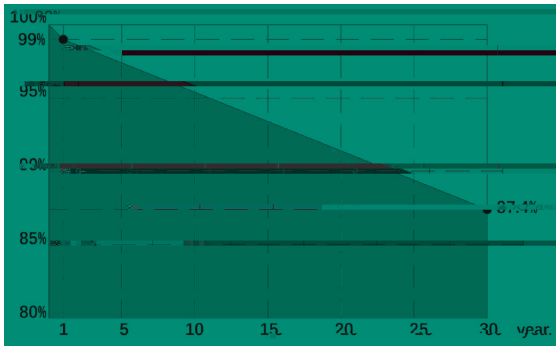

At least 87.4% of nominal power up to 30 years

Operating Temperature	-40 ~ +85
Power Tolerance	0~ +5W
Maximum System Voltage	1500V(IEC)
NMOT	45±2
Maximum Series Fuse Rating	35A
Junction Box	IP68