Mechanical Parameters

GBC

108 6×18

Dual glass, 2.0+2.0mm coated semi tempered glass

Black anodized aluminum

TüV 1×4mm2, (+)300mm, (-)200mm
or Customized Length

MC4 Compatible/MC4-Evo2

36 pcs per pallet
216 pcs per 20’ GP, 864 pcs per 40’ HC


Class II

IEC Class C

Engineering Drawings

Front Side Back

* L:±2mm W:±2mm Unit:mm

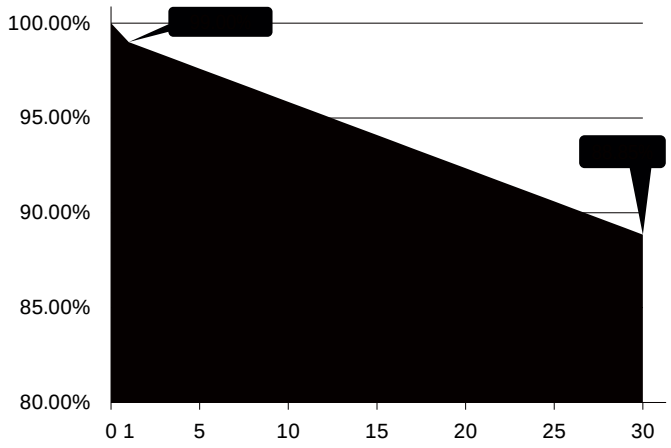

Temperature Ratings (STC)

Mechanical Loading