
Gokin

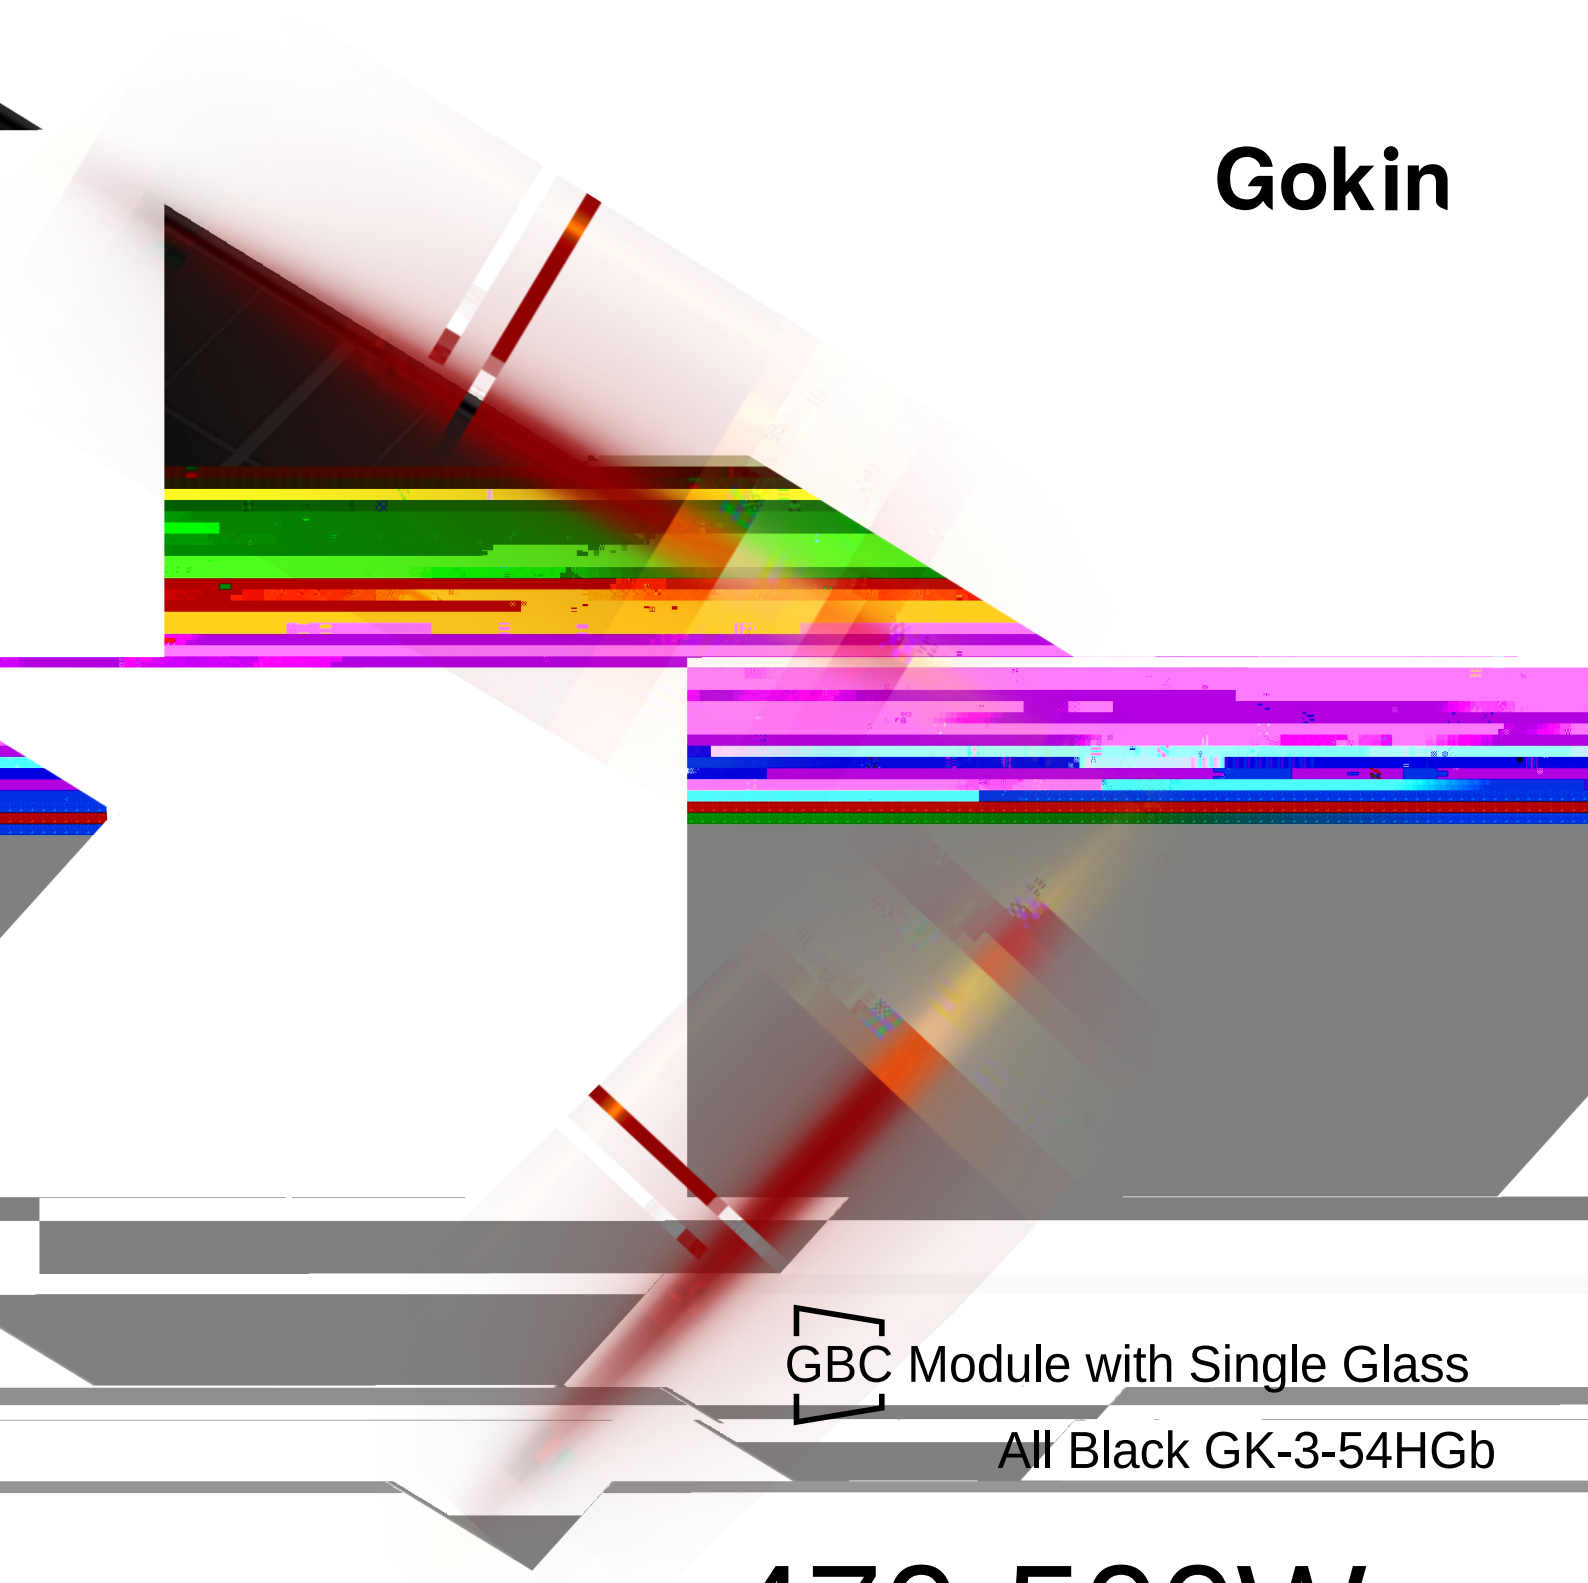

GBC Module with Single Glass

All Black GK-3-54HGb

# 470-500W

a Â × ø h Â ð Â © Â · ø Â Í Higher Generated Energy

Higher Reliability

Lower BOS

Excellent Micro-crack Resistance

High Temperature Restriction

Partial Shading Optimisation

Extraordinary Aesthetic Design


- Operating Temperature ~40°C ~ +85°C
- Power Tolerance 0~+3%
- Junction Box IP68
- NOCT 45±2
- Maximum Series Fuse Rating 25A
- Maximum System Voltage 1500V(IEC)

## Mechanical Parameters

## Engineering Drawings

Front Side Back

* L:±2mm W:±2mm Unit:mm

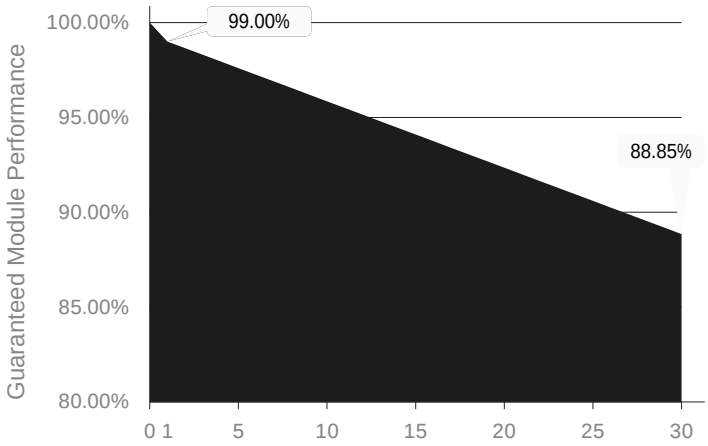


## Temperature Ratings (STC)

## Mechanical Loading

| | |
|---|---|
| Front Side Maximum Static Loading | 5400Pa |
| Rear Side Maximum Static Loading | 2400Pa |
| Hailstone Test | 25 mm diameter hail at 23 m/s |