
Gokin

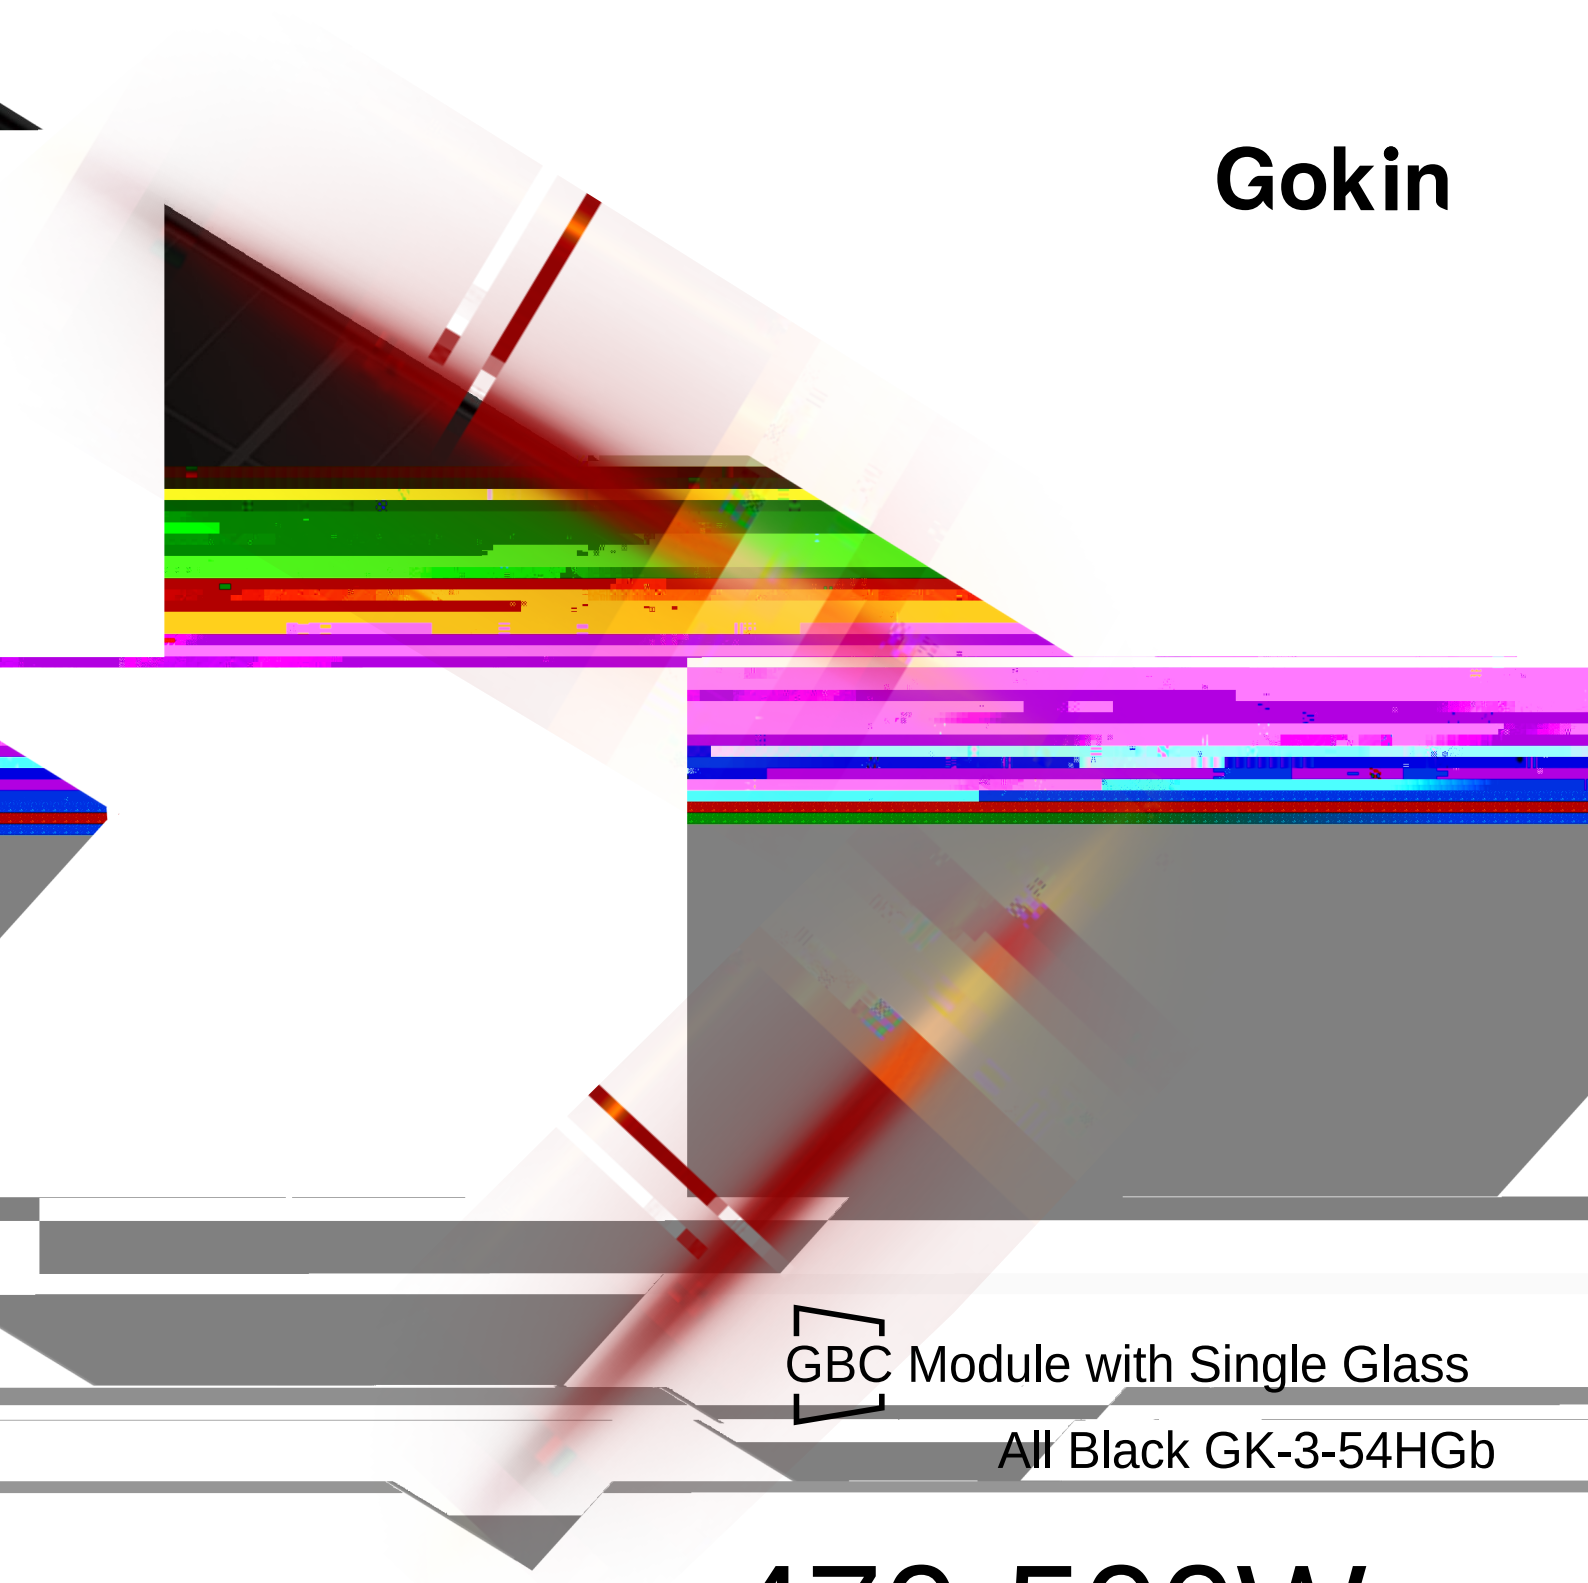

GBC Module with Single Glass

All Black GK-3-54HGb

470-500W

a Â × ø h Â ð Â © Â · ø Â Í Higher Generated Energy

Higher Reliability

Lower BOS

Excellent Micro-crack Resistance

High Temperature Restriction

Partial Shading Optimisation

Extraordinary Aesthetic Design


- Operating Temperature ~40°C ~ +85°C
- Power Tolerance 0~+3%
- Junction Box IP68
- NOCT 45±2
- Maximum Series Fuse Rating 25A
- Maximum System Voltage 1500V(IEC)

Mechanical Parameters

Engineering Drawings

Front Side Back

* L:±2mm W:±2mm Unit:mm

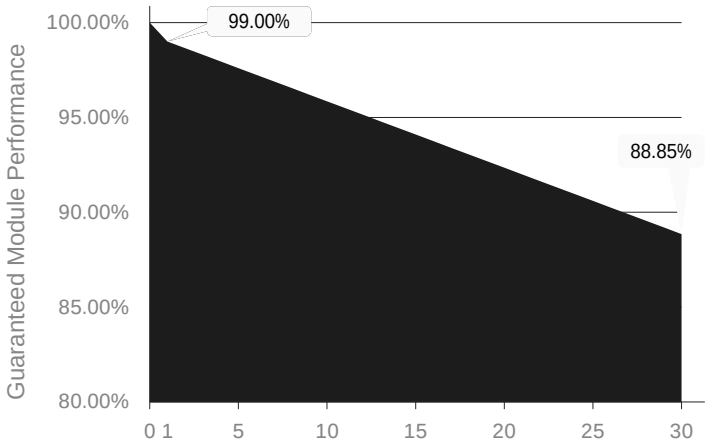

Temperature Ratings (STC)

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25 mm diameter hail at 23 m/s