Gokin

FLAMINGO GK-1-60HT

475-505W

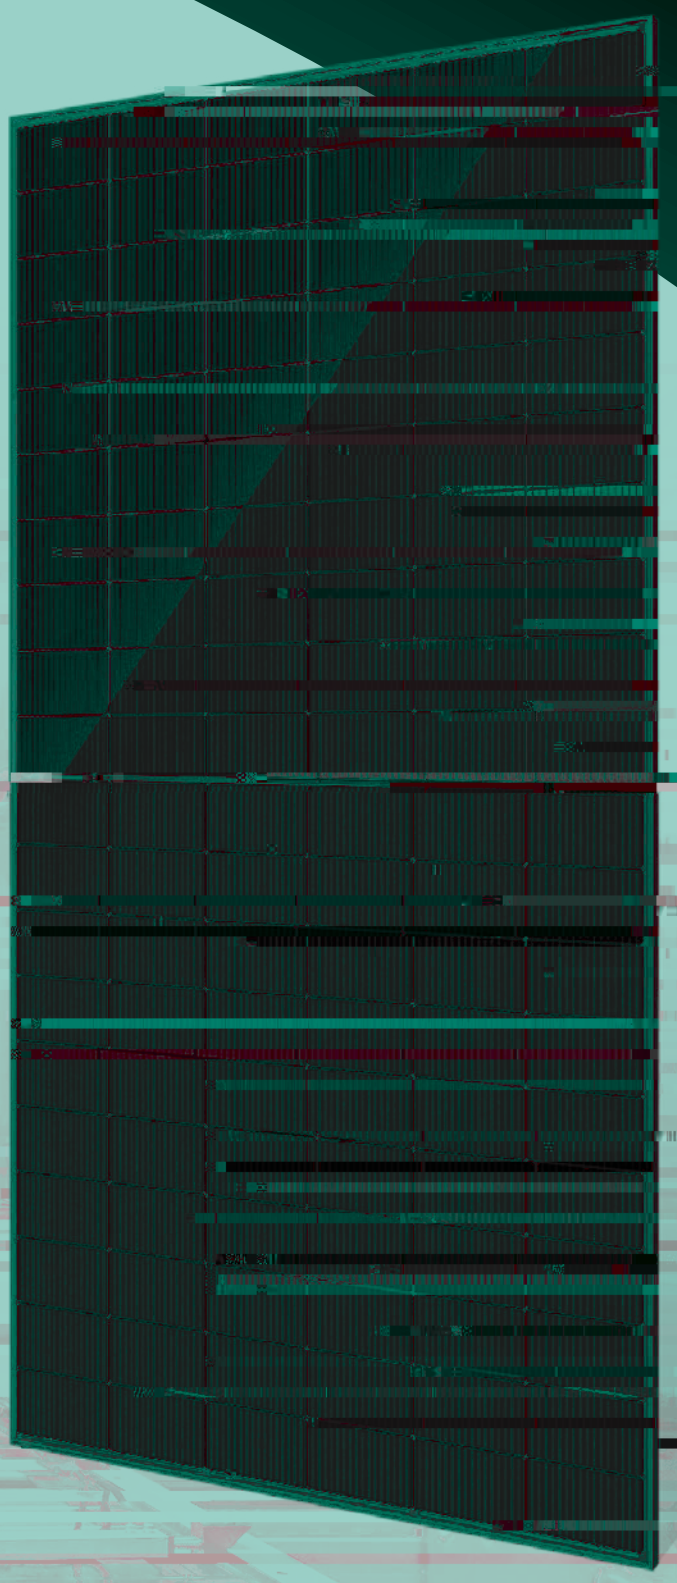

Supreme Quality

Module efficiency up to 23.3% based on N-Type wafer and TOPCon technology

More power output in field operation due to better thermal behaviors, weak-light performance and bifaciality

Unsusceptible to LID, LeTID and less annual degradation due to special charateristics of N-Type

High module quality ensures long-term reliability

Module Characteristics

15-Year	30-Year	1%	0.4%
Product Warranty	Linear Power Warranty	First Year Degradation	Annual Power Degradation

CLEAN ENERGY COUNCIL MEMBER

CERTIFIED

IEC 61215(2021) / IEC 61730(2023)

ISO 9001: 2015: ISO Quality Management System

Anti-PID / Ammonia / Salt-mist / Dust and sand

Made in China

(STC 1000W/M² 25 AM1.5)

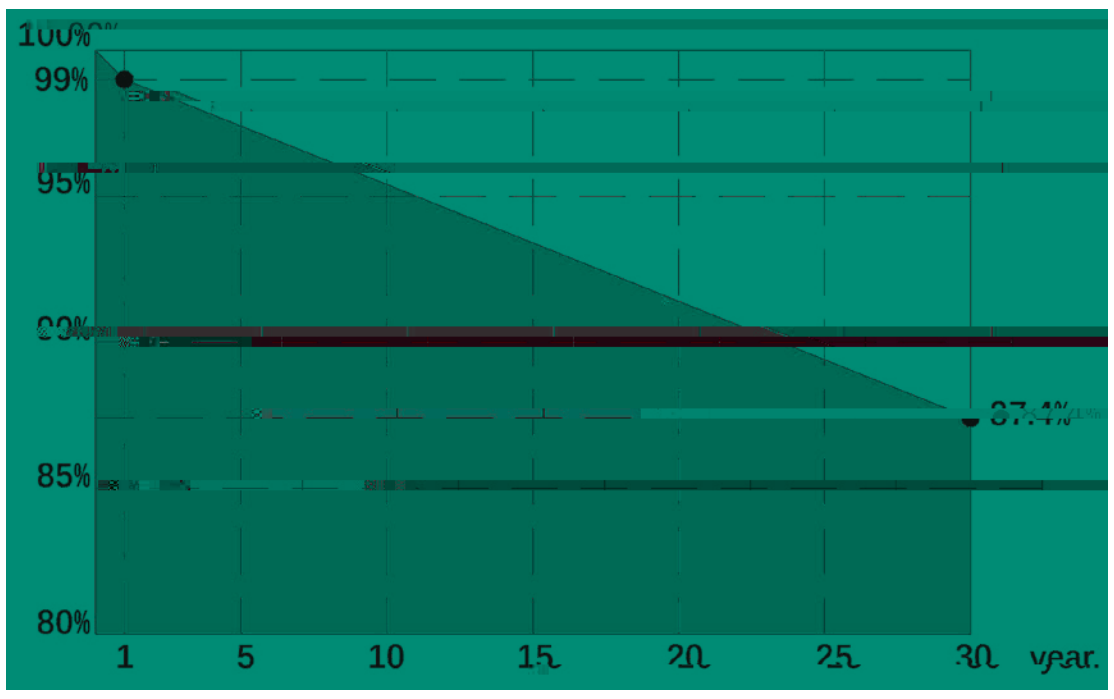

At least 87.4% of nominal power up to 30 years

Operating Temperature	-40 ~ +85
Power Tolerance	0~ +5W
Maximum System Voltage	1500V(IEC)
NMOT	45±2
Maximum Series Fuse Rating	35A
Junction Box	IP68

TTCt S t B Ŷstn ± Ÿeanom R oJ ṅ e t B Î n eamo ı M