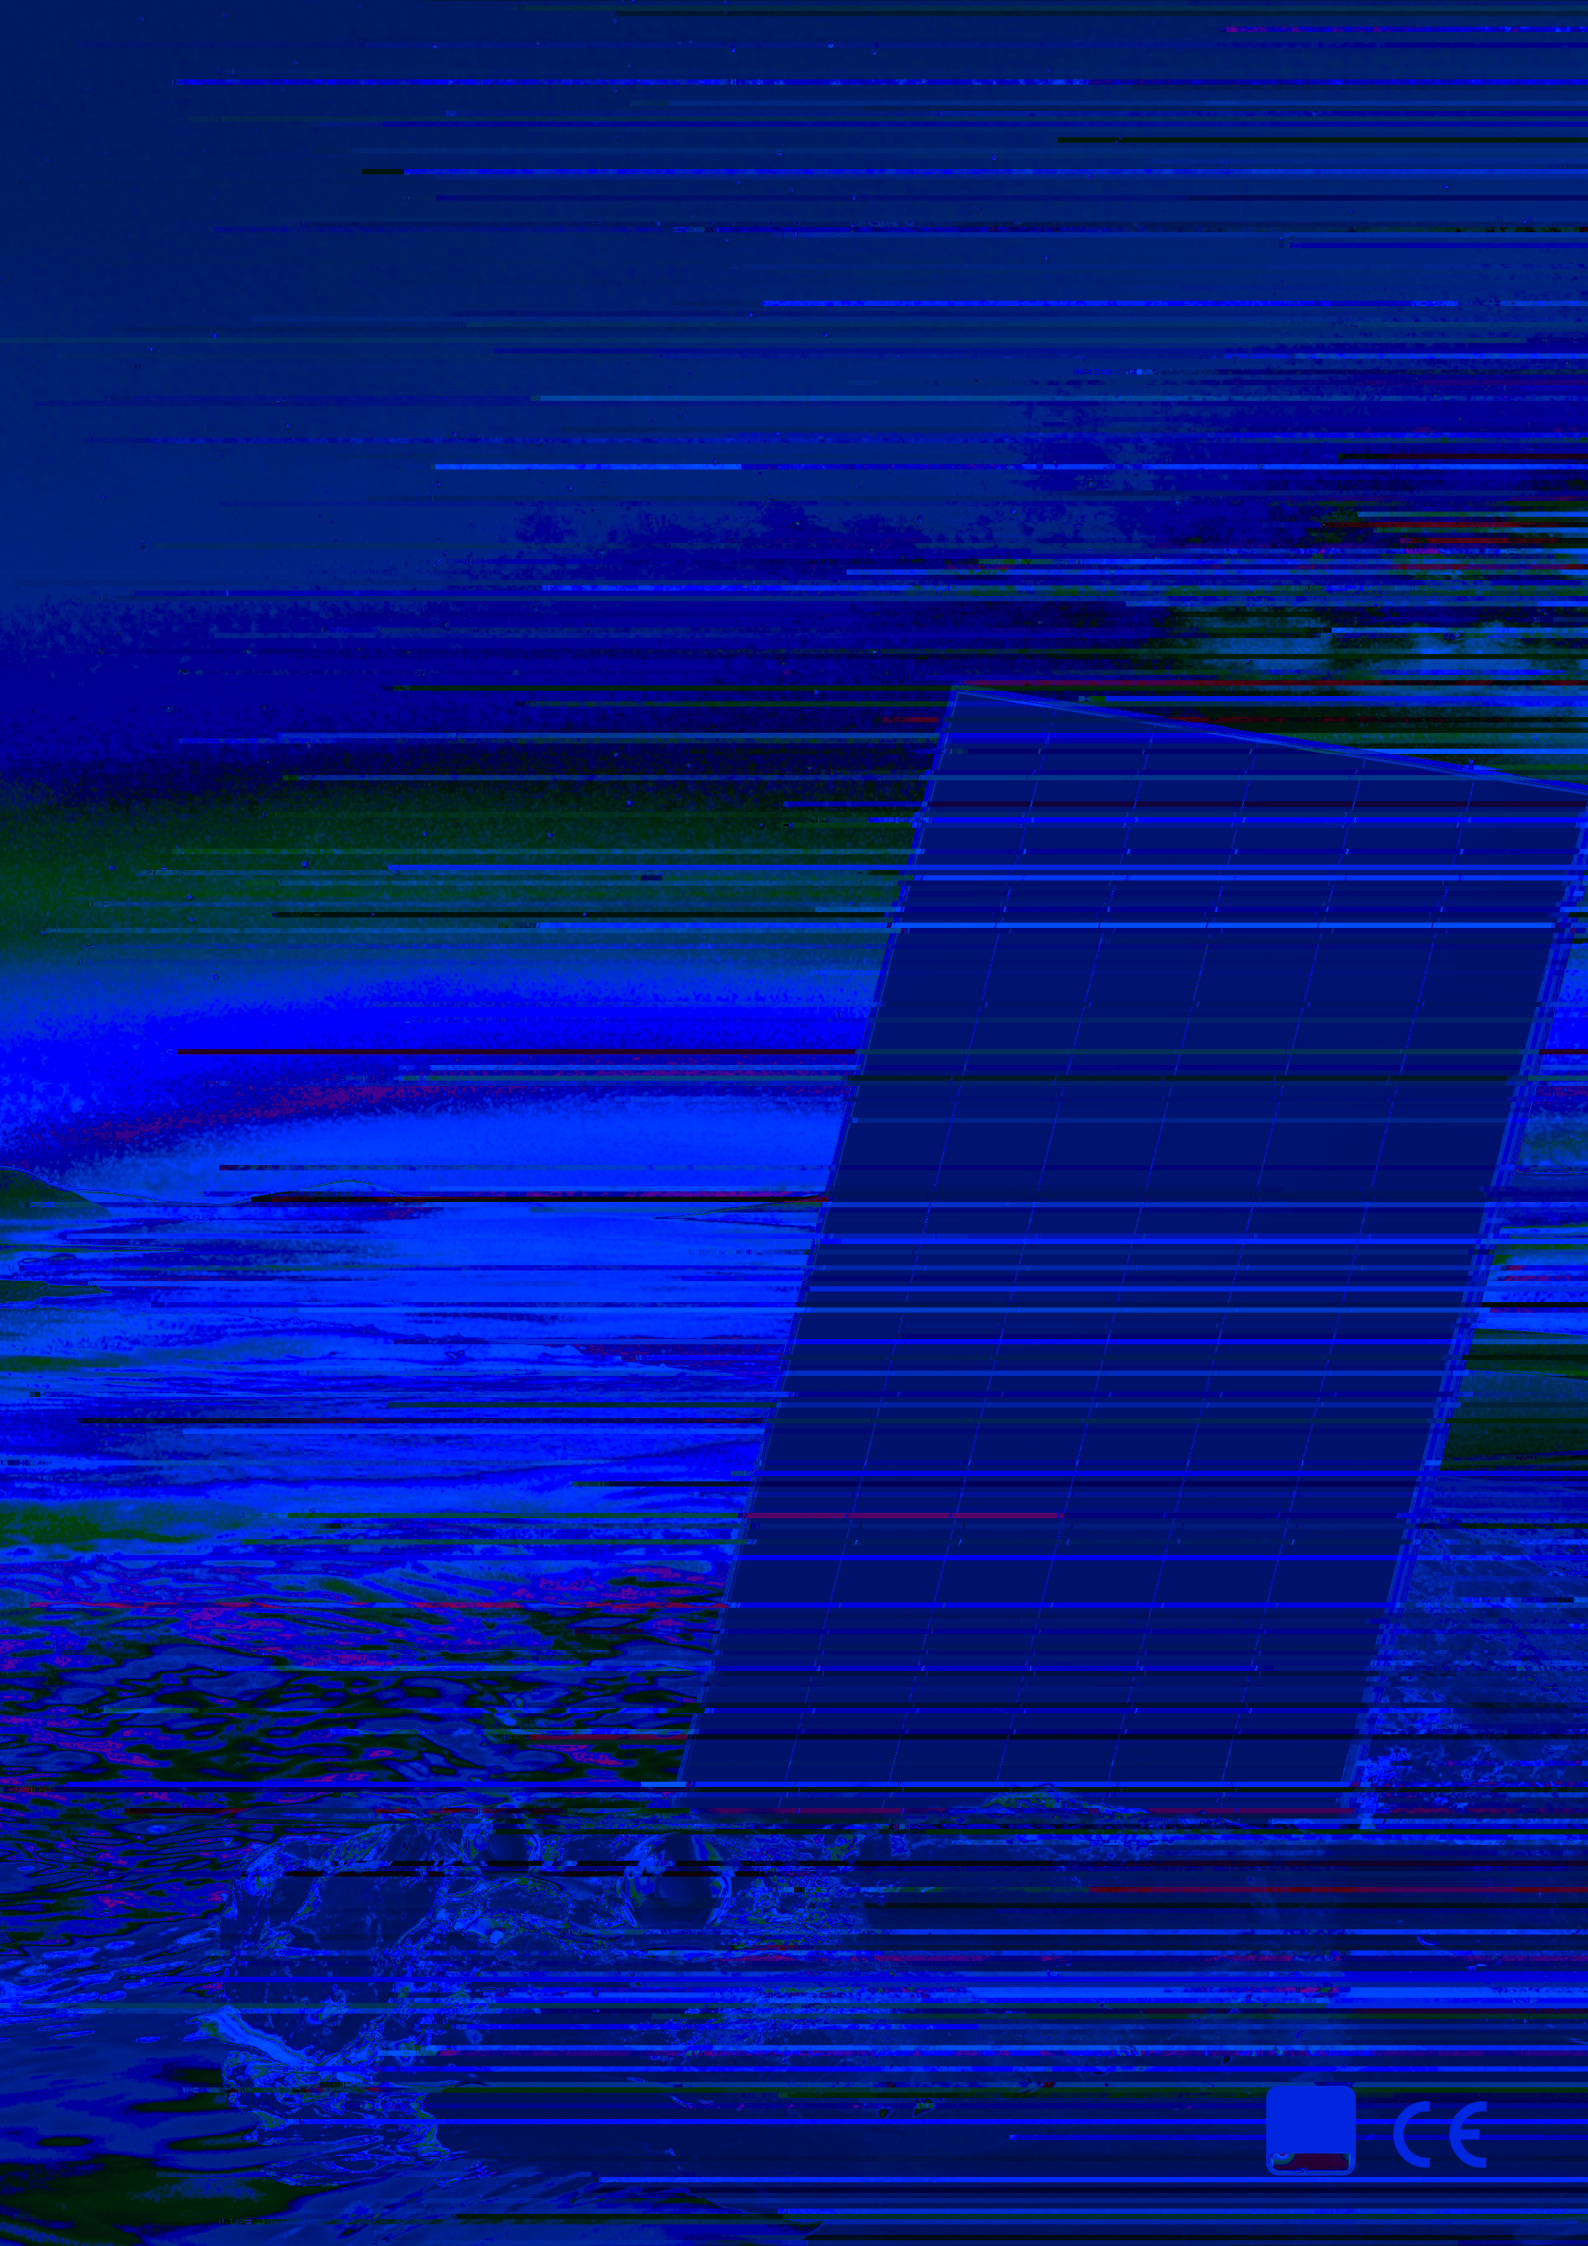


Maximum Series Fuse Rating

Mechanical Parameters

	GBC
	108　6×18
	Dual glass, 2.0+2.0mm coated semi tempered glass
	Black anodized aluminum
	TüV 1×4mm², (+)300mm, (-)200mm or Customized Length
	MC4 Compatible/MC4-Evo2
	37 pcs per pallet 222 pcs per 20’ GP, 888 pcs per 40’ HC
	Class II
	IEC Class C

Engineering Drawings

Front　Side　Back

* L:±2mm　W:±2mm　Unit:mm