Gokin

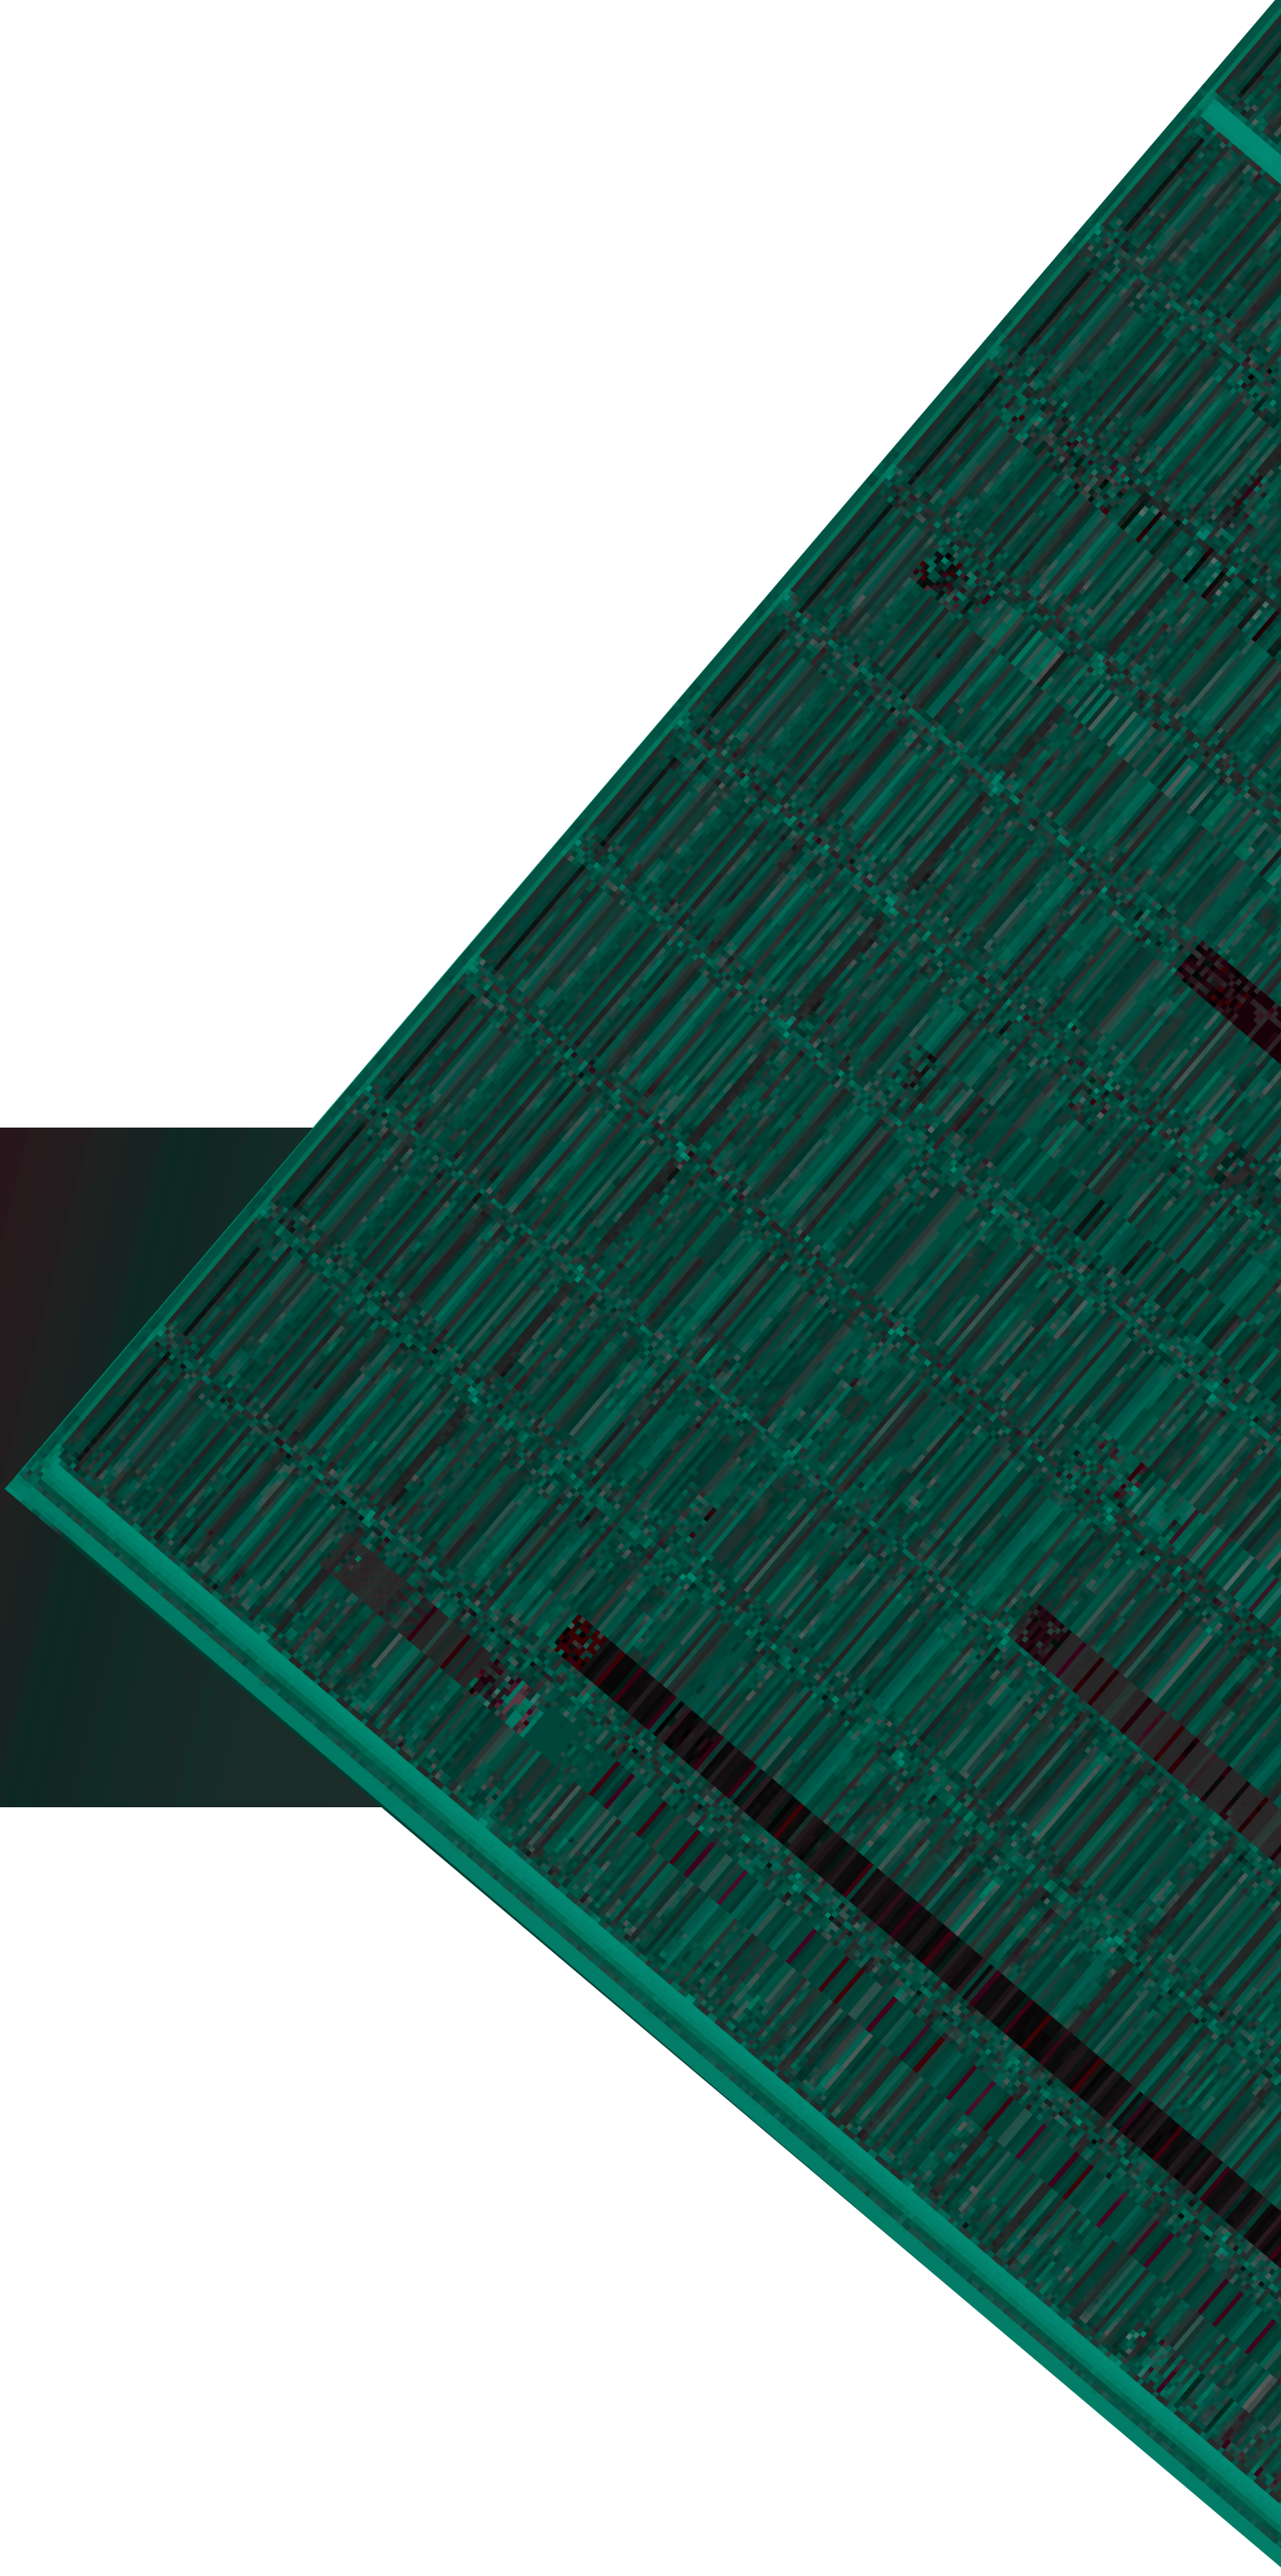

590-620W

23.0%
Module Efficiency up to

≤ First-year Degradation
≤ Annual Degradation

Module efficiency up to 23.0% based on
N-Type wafer and TOPCon technology

Nhnsatirftu ǜ b º c E ч × l tyHigh E dule e × l tydog ȶ Tirf ue igtifity

Linear Power Warranty

More power output in field operation
due to better thermal behaviors,
weak-light performance and bifaciality

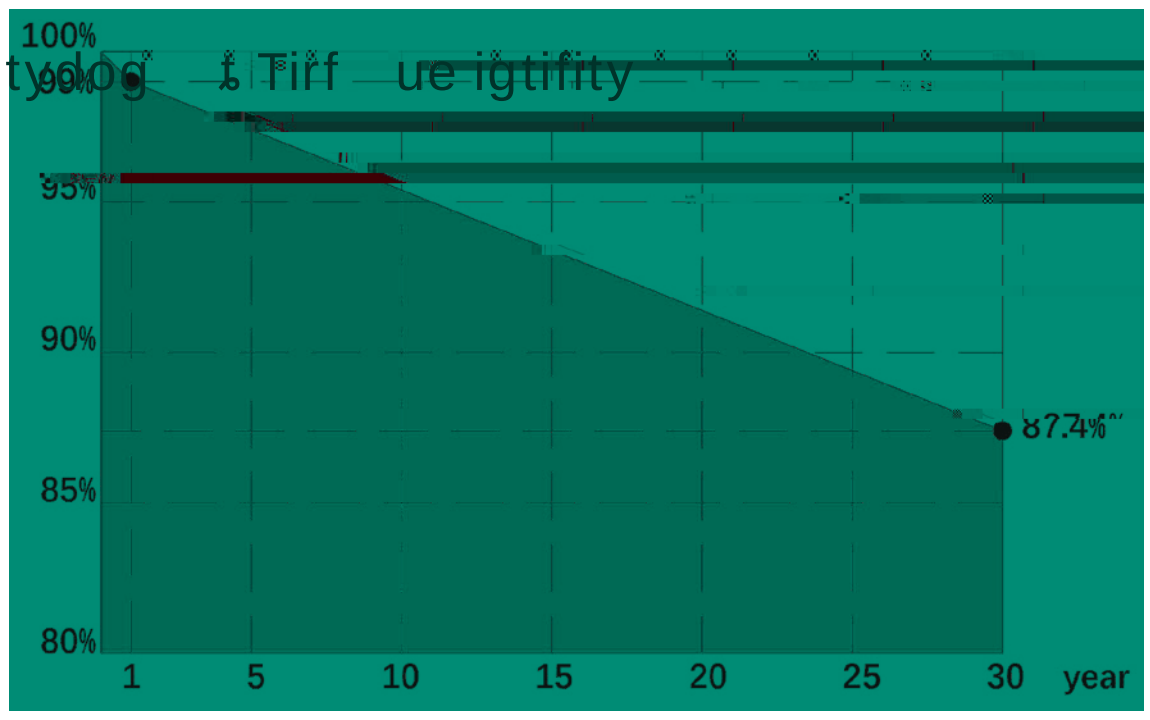

IEC 61215(2021) / IEC 61730(2023)
ISO 9001: 2015: ISO Quality Management System
Anti-PID / Ammonia / Salt-mist / Dust and sand

- -40°C ~ +85°C
- 80±5%

g

Temperature coefficient of Isc+0.045%/